FAITHFULL FURNISHINGS

INSTALLATION GUIDE

Palacial Tiered K9 Crystal Semi-Flush Mount

19" size · Oil-Rubbed Bronze · CL11906-BZ

Before you begin

WARNING: Disconnect power at the main fuse box before installation.

WARNING: This fixture is intended for installation in accordance with the National Electrical Code (NEC) and all local code specifications. If you are not familiar with code requirements, installation by a certified electrician is recommended.

Before assembly, remove all parts and part packages from box. If anything is missing, please contact the retailer from which the product was purchased.

PARTS IN THIS GUIDE


- ☐ A Mounting bracket
- ☐ B Junction box screws
- ☐ C Wire nuts
- ☐ D Canopy
- ☐ F Finial
- ☐ K Crystal bars
- ☐ O Fixture body

YOU'LL NEED

- ☐ Electrical tape (not included)
- ☐ 3 E12 candelabra bulbs, 60 W max each (not included)

1. Carefully pull house wires out of junction box so they are easily accessible during installation.
2. Position mounting bracket (A) so the head of the attached ground screw is pointing down towards floor.
3. Place mounting bracket (A) up against junction box. Align each slot in mounting bracket (A) with each hole in junction box.
4. Thread one junction box screw (B) into each slot in mounting bracket (A) and into holes in junction box. Tighten junction box screws (B) to secure mounting bracket (A) to junction box.

CAUTION: Make sure house wires are still easily accessible. DO NOT pinch wires between mounting bracket and ceiling.

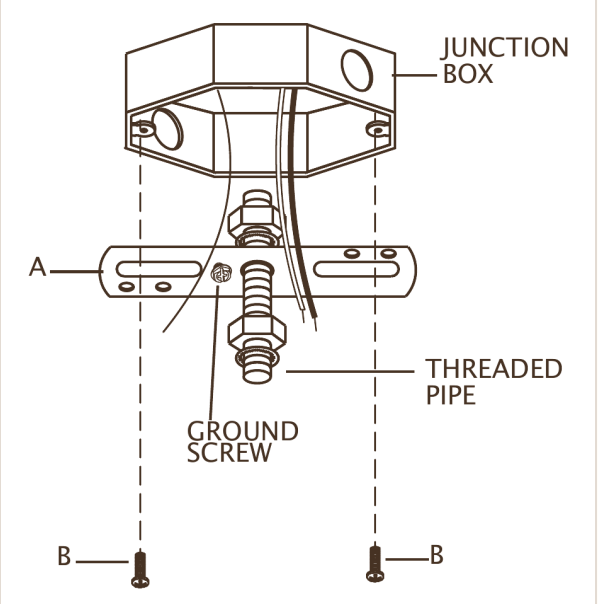


Palacial Semi-Flush Mount · Wiring

19" size · Oil-Rubbed Bronze · CL11906-BZ

5. Strip 3/4” of insulation from ends of fixture wires.
6. Slightly loosen ground screw on mounting bracket (A). Do not completely remove ground screw. Wrap house ground wire (copper) around ground screw, leaving enough ground wire to attach to fixture ground wire. Twist end of fixture ground wire and end of house ground wire (copper) together. Twist wire nut (C) onto ends of wires. Completely tighten wire nut (C). Reference chart below for correct wire connections.


Connect Supply (House) Ground Copper Wire to:
Bare Copper Wire or,
Bare Silver Wire or,
Green Insulated Wire.

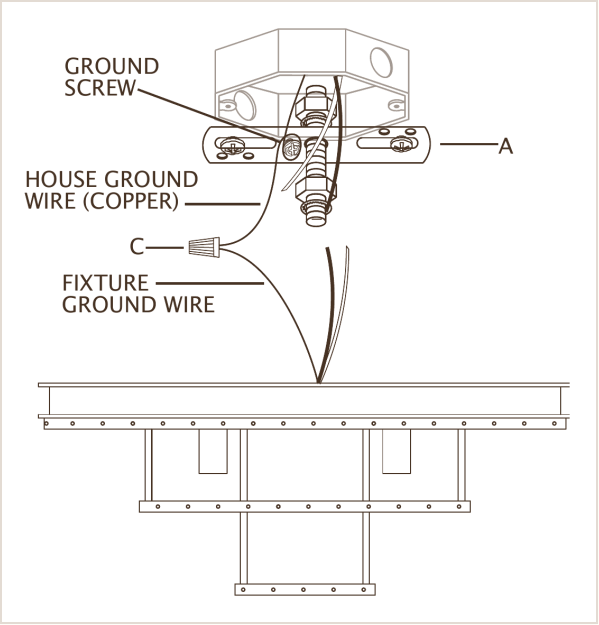

7. Twist end of house lead wire (black) and end of fixture lead wire together. Twist wire nut (C) onto ends of wires. Completely tighten wire nut (C). Twist end of house neutral wire (white) and end of fixture neutral wire together. Twist wire nut (C) onto ends of wires. Completely tighten wire nut (C). Reference chart to the right for correct wire connections.
8. Wrap electrical tape (not included) around wire nuts (C) and wires. Ensure wires are securely fastened into wire nuts.
9. Carefully push all wires and wire nuts into junction box.

Connect Black Lead Supply (House) Wire to:	Connect White Neutral Supply (House) Wire to:
Black Wire or,	White Wire or,
*Parallel Cord (Round and Smooth) or,	*Parallel Cord (Square and Ridged) or,
No printed words on wire insulation or,	Printed words on wire insulation or,
Insulated Wire (other than green) with Copper Conductor.	Insulated Wire (other than green) with Silver Conductor.

*When parallel wire (SPT 1 & SPT 2) is used: The lead wire is round in shape or smooth. The neutral wire is square in shape or ridged.

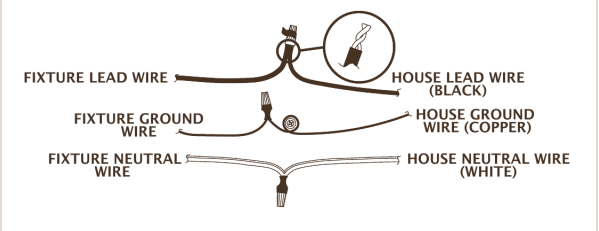


Palacial Semi-Flush Mount · Hanging

19" size · Oil-Rubbed Bronze · CL11906-BZ

10. Raise canopy (D) up to ceiling. Pass hole in center of canopy (D) over end of threaded pipe on mounting strap (A).
11. Thread finial (F) onto end of threaded pipe protruding from fixture. Tighten finial (F) to secure fixture to ceiling.
12. Screw recommended bulbs (E12 candelabra bulb type, not included) into sockets. Verify correct bulb wattage marked on socket of fixture.
13. Slip hook on top of each crystal bar (K) through holes along fixture body (O).

WARNING: DO NOT exceed maximum bulb wattage.

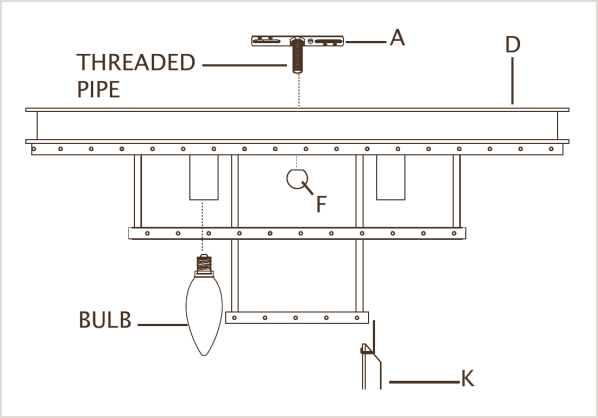

FIXTURE AT A GLANCE

- ☐ 19" W × 19" D × 13" H
- ☐ Weight: 22 lb
- ☐ Finish: Oil-Rubbed Bronze, clear K9 crystal
- ☐ 3 × 60 W max, B11 candelabra bulbs (E12 base)
- ☐ Voltage: 120 V

GOOD TO KNOW

- ☐ Hardwired, ceiling mounted
- ☐ Can be installed on sloped or vaulted ceilings
- ☐ UL safety rating, dry location, indoor use only
- ☐ Dimmable with dimmable bulbs and a compatible dimmer switch (not included)
- ☐ 1-year limited warranty

Need help?

Email support@faithfullfurnishings.com or call (402) 249-0771.